



linea m eco

tunableWhite

The **linea m** combines modern design, high efficiency, and robust construction in a versatile linear lighting solution. With its premium build quality and reliable technology, it is suitable for both indoor and outdoor applications.

The **linea m** offers exceptional optical flexibility with four variants: **pureWhite**, **pureColor**, **tunableWhite**, and **RGBW**. While pureWhite provides natural illumination in different color temperatures, pureColor options create vivid accents in red, green, blue, and amber. The tunableWhite technology allows seamless adjustment of color temperature, while RGBW combines saturated colors with pure white for dynamic lighting effects.

Available in two performance classes – **eco** and **hp**, the eco variant is optimized for energy efficiency, making it ideal for applications with a strong focus on sustainability. The hp variant, on the other hand, delivers a higher light output for demanding lighting scenarios requiring maximum brightness. Both versions ensure excellent light quality and can be tailored to various application needs.

With a **wide range of beam angles** – from narrow to wide distributions – the **linea m** can be perfectly adapted to specific lighting requirements. Additionally, **optional anti-glare systems**, such as internal honeycomb grids or linear glare control, provide precise light control for enhanced visual comfort.

Technical Data

Luminous color	2200 K - 4000 K, 2700 K - 6500 K
Luminous flux	629 mm 24.77 in → max. 1752 lm 934 mm 36.78 in → max. 2628 lm 1239 mm 48.78 in → max. 3504 lm
Number of LED(s)	629 mm 24.77 in → 16 LEDs 934 mm 36.78 in → 24 LEDs 1239 mm 48.78 in → 32 LEDs
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)
Dimming	Integrated interface(s) / control: DALI, DMX, IoT
Housing	Extruded aluminium profile
Housing color	Aluminium anodized, Black anodized
Lens	Ultra clear, tempered safety glass
Weight	629 mm 24.77 in → 5.0 kg 11.1 lb 934 mm 36.78 in → 7.0 kg 15.5 lb 1239 mm 48.78 in → 9.0 kg 19.9 lb


The weight of the fixture can vary depending on the configuration!

Environment	Indoor, Outdoor
Ingress protection rating	IP66
Humidity	0 to 95%, non-condensing
Ambient temperature (Operation)	-40 °C to 40 °C -40 °F to 104 °F
Ambient temperature (Storage)	-40 °C to 80 °C -40 °F to 176 °F
Ambient temperature (Start-up process)	-25 °C to 40 °C -13 °F to 104 °F
Lumen Maintenance [L70] @ 25 °C	65,000 h
Lumen Maintenance [L70] @ 40 °C	40,000 h
Impact protection rating	IK07
Electrical data	

Integrated interface(s) / control:	DALI, DMX, IoT
Internal power supply	100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC
Power Consumption	
629 mm 24.77 in	→ 26 W
934 mm 36.78 in	→ 39 W
1239 mm 48.78 in	→ 42 W
Protection class	I
Inrush @ 230 V	
629 mm / 24.76 in	→ 50 A (Coldstart, $t_{width} = 210 \mu s$ measured at 50% I_{peak})
934 mm / 36.77 in	→ 55 A (Coldstart, $t_{width} = 270 \mu s$ measured at 50% I_{peak})
1239 mm / 48.78 in	→ 55 A (Coldstart, $t_{width} = 270 \mu s$ measured at 50% I_{peak})
Power factor correction @ 230 V	
629 mm / 24.76 in	→ 0.95
934 mm / 36.77 in	→ 0.95
1239 mm / 48.78 in	→ 0.95
LED-Class	Class 2 LED-Product
Approbation	CE, ETL, FCC

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

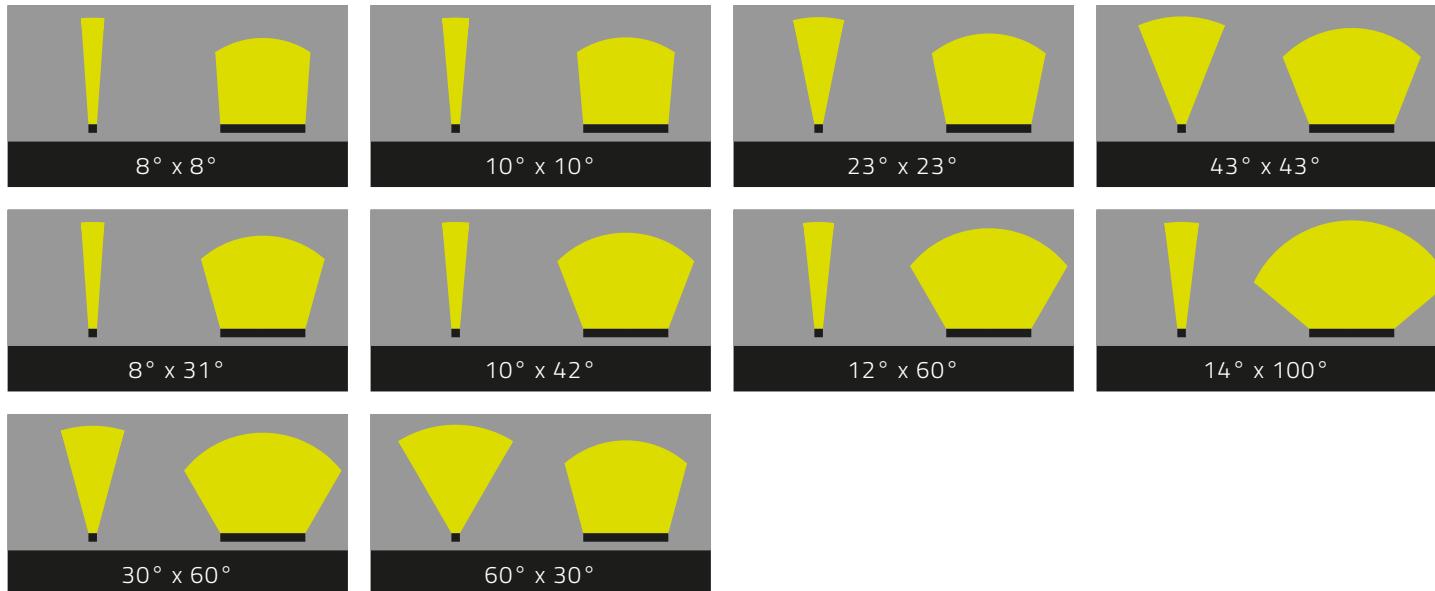

Configurator



Product Code: LIN-M-ECO - - - - - - - - - - - Y03

1 Luminous color
TW8322 2200 K- 4000 K 8340
TW8327 2700 K- 6500 K 8365

2 Dimming
DALI
DMX
IoT

3 Dimension
629 629 mm / 24.76 in
934 934 mm / 36.77 in
1239 1239 mm / 48.78 in

4 Beam Angle
8X8 8° x 8°
10X10 10° x 10°
23X23 23° x 23°
43X43 43° x 43°
8X31 8° x 31°
10X42 10° x 42°
12X60 12° x 60°
14X100 14° x 100°
30X60 30° x 60°
60X30 60° x 30°

5 Approbation
CE European Union
ETL North America

6 Housing color
AA Aluminium anodized
BA Black anodized

7 Leader cable location
L Left
R Right

8 Leader cable length
ETE End to end - Leader length
003 30 cm (11.8 in) leader cable
006 60 cm (23.6 in) leader cable
009 90 cm (35.4 in) leader cable
012 1,2 m (47.2 in) leader cable

9 Glare Protection
OP No Glare Protection
HL64 Honeycomb louver (internal, 6,4mm)
LLO Linear louver (internal)

10 Mounting
MX00 Mounting bracket Fix 0°
MX20 Mounting bracket Fix 20°
MSH Mounting Set Hinge