



linea m hp

Color Changing


The **linea m** combines modern design, high efficiency, and robust construction in a versatile linear lighting solution. With its premium build quality and reliable technology, it is suitable for both indoor and outdoor applications.

The **linea m** offers exceptional optical flexibility with four variants: **pureWhite**, **pureColor**, **tunableWhite**, and **RGBW**. While pureWhite provides natural illumination in different color temperatures, pureColor options create vivid accents in red, green, blue, and amber. The tunableWhite technology allows seamless adjustment of color temperature, while RGBW combines saturated colors with pure white for dynamic lighting effects.

Available in two performance classes – **eco** and **hp**, the eco variant is optimized for energy efficiency, making it ideal for applications with a strong focus on sustainability. The hp variant, on the other hand, delivers a higher light output for demanding lighting scenarios requiring maximum brightness. Both versions ensure excellent light quality and can be tailored to various application needs.

With a **wide range of beam angles** – from narrow to wide distributions – the **linea m** can be perfectly adapted to specific lighting requirements. Additionally, **optional anti-glare systems**, such as internal honeycomb grids or linear glare control, provide precise light control for enhanced visual comfort.

Dimensions



Metric:	
629 mm, 934 mm, 1239 mm (X)	75 mm (Y)
	71 mm (Z)
Imperial	
24.77 in, 36.78 in, 48.78 in (X)	2.96 Inch (Y)
	2.80 Inch (Z)

Technical Data

Luminous color	RGBW2200K, RGBW2700K, RGBW3000K, RGBW4000K	Ambient temperature (Operation)	-40 °C to 40 °C -40 °F to 104 °F
Number of LED(s)	629 mm 24.77 in → 24 LEDs 934 mm 36.78 in → 36 LEDs 1239 mm 48.78 in → 48 LEDs	Ambient temperature (Storage)	-40 °C to 80 °C -40 °F to 176 °F
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)	Ambient temperature (Start-up process)	-25 °C to 40 °C -13 °F to 104 °F
Dimming	Non dimmable Integrated interface(s) / control: NDIMtc, 0-10 V, DALI, DMX, IoT	Lumen Maintenance [L70] @ 25 °C	65,000 h
Housing	Extruded aluminium profile	Lumen Maintenance [L70] @ 40 °C	40,000 h
Housing color	Aluminium anodized, Black anodized	Impact protection rating	IK07
Lens	Ultra clear, tempered safety glass	Electrical data	
Environment	Indoor, Outdoor	Non dimmable Integrated interface(s) / control: NDIMtc, 0-10 V, DALI, DMX, IoT	
Ingress protection rating	IP66	Internal power supply	100 - 240, 277 VAC (50 - 60 Hz)
Humidity	0 to 95%, non-condensing	Power Consumption	

629 mm | 24.77 in → 42 W
 934 mm | 36.78 in → 63 W
 1239 mm | 48.78 in → 84 W

Protection class I

Inrush @ 230 V

629 mm / 24.76 in → 50 A
 (Coldstart, $t_{width} = 210 \mu s$ measured at 50% I_{peak})

934 mm / 36.77 in → 55 A
 (Coldstart, $t_{width} = 270 \mu s$ measured at 50% I_{peak})

1239 mm / 48.78 in → 55 A
 (Coldstart, $t_{width} = 270 \mu s$ measured at 50% I_{peak})

Power factor correction @ 230 V

629 mm / 24.76 in → 0.95

934 mm / 36.77 in → 0.95

1239 mm / 48.78 in → 0.95


LED-Class Class 2 LED-Product

Approbation CE, ETL, FCC

Designed and Developed in Bavaria.

Made in Germany.

Beam Angles

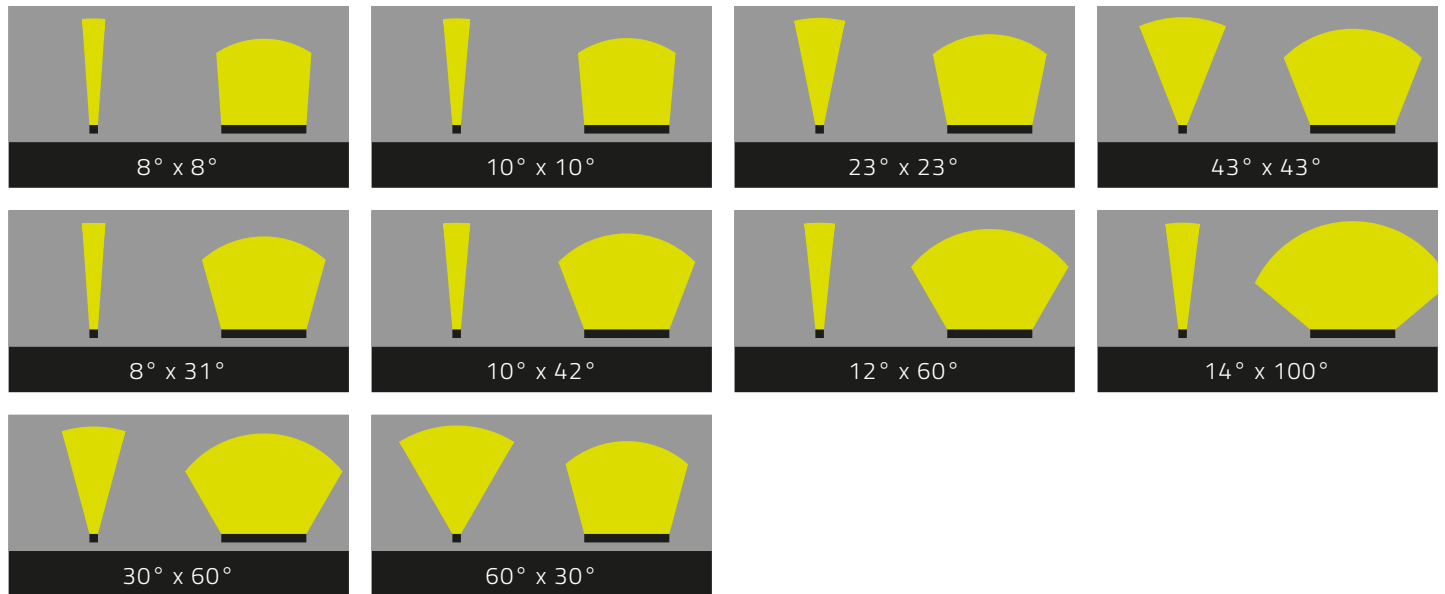

Configurator

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

LIN-M-HP - - - - - - - - - - - - -Y03

1 Luminous color

RGBW83 22	RGBW2200 K / 3 SDCM / CRI > 80
RGBW83 27	RGBW 2700 K (CRI > 80 / 3 SDCM)
RGBW83 30	RGBW 3000 K (CRI > 80 / 3 SDCM)
RGBW83 40	RGBW4000 K / 3 SDCM / CRI > 80

2 Dimming

NDIM	Non dimmable
NDIMTC	NDIMtc
010V	0-10 V
DALI	DALI
DMX	DMX
IOT	IoT

3 Dimension

629	629 mm / 24.76 in
934	934 mm / 36.77 in
1239	1239 mm / 48.78 in

4 Beam Angle

8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
60X30	60° x 30°

5 Approbation

CE	European Union
ETL	North America

6 Housing color

AA	Aluminium anodized
BA	Black anodized

7 Leader cable location

L	Left
R	Right

8 Leader cable length

ETE	End to end - Leader length
003	30 cm (11.8 in) leader cable
006	60 cm (23.6 in) leader cable
009	90 cm (35.4 in) leader cable
012	1,2 m (47.2 in) leader cable

9 Glare Protection

OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL0	Linear louver (internal)

10 Mounting

MX00	Mounting bracket Fix 0°
MX20	Mounting bracket Fix 20°
MSH	Mounting Set Hinge