
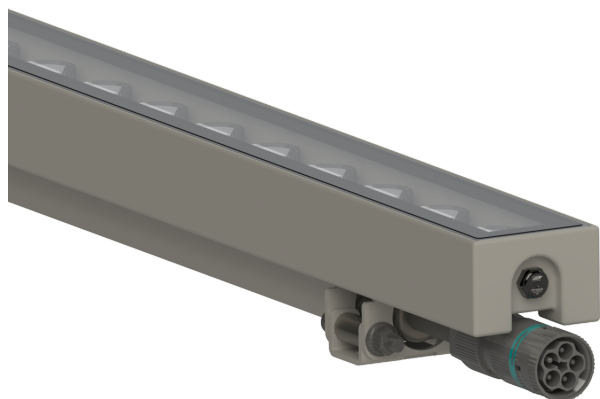




linea xc mp

Color Changing

Dimensions


Metric:

327 mm, 480 mm, 632 mm, 785 mm, 937 mm, 1090 mm,
 1242 mm (X)
 49 mm (Y)
 58 mm (Z)

Imperial

12.88 in, 18.90 in, 24.89 in, 30.91 in, 36.89 in, 42.92 in,
 48.90 in (X)
 1.93 Inch (Y)
 2.29 Inch (Z)

Technical Data

Luminous color	RGBA, RGBW2200K, RGBW2700K, RGBW3000K, RGBW4000K	Ambient temperature (Operation)	-40 °C to 40 °C -40 °F to 104 °F
Number of LED(s)	327 mm 12.88 in → 8 LEDs 480 mm 18.90 in → 12 LEDs 632 mm 24.89 in → 16 LEDs 785 mm 30.91 in → 20 LEDs 937 mm 36.89 in → 24 LEDs 1090 mm 42.92 in → 28 LEDs 1242 mm 48.90 in → 32 LEDs	Ambient temperature (Storage)	-25 °C to 80 °C -13 °F to 176 °F
Glare Protection	No Glare Protection, Honeycomb louver (internal, 6,4mm), Linear louver (internal)	Ambient temperature (Start-up process)	-40 °C to 40 °C -40 °F to 104 °F
Dimming	Integrated interface(s) / control: DMX	Lumen Maintenance [L70] @ 25 °C	65,000 XXX
Housing	Extruded aluminium profile	Lumen Maintenance [L70] @ 40 °C	40,000 XXX
Housing color	RAL_____, (smooth, matt), DB 703 metallic dark grey fine-textured	Impact protection rating	IK08
Lens	Ultra clear, tempered safety glass	Electrical data	
Environment	Indoor, Outdoor	Integrated interface(s) / control: DMX	
Ingress protection rating	IP66	Constant voltage	36 V
Humidity	0 to 95%, non-condensing	Power Consumption	
		327 mm 12.88 in → 10 W	
		480 mm 18.90 in → 15 W	
		632 mm 24.89 in → 20 W	
		785 mm 30.91 in → 25 W	
		937 mm 36.89 in → 30 W	
		1090 mm 42.92 in → 35 W	

1242 mm | 48.90 in → 40 W


Protection class II

LED-Class Class 2 LED-Product



Approbation CE, ETL, FCC

Designed and Developed in Bavaria.
Made in Germany.

Beam Angles

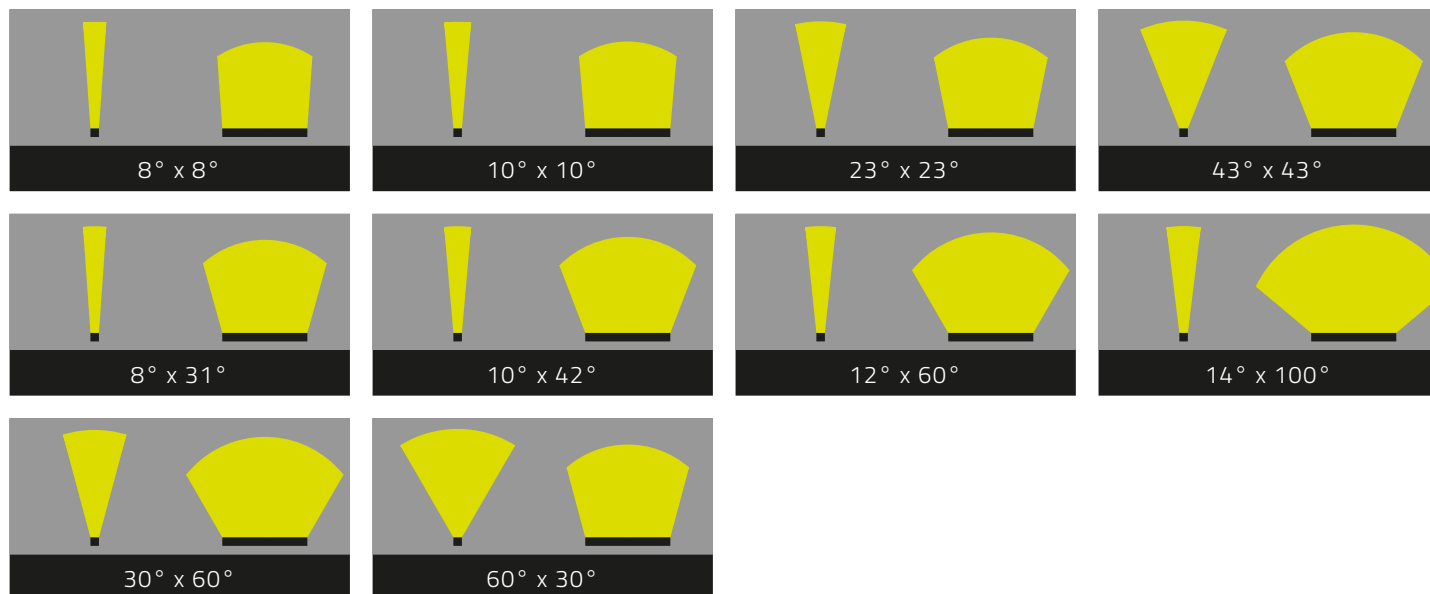

Accessories

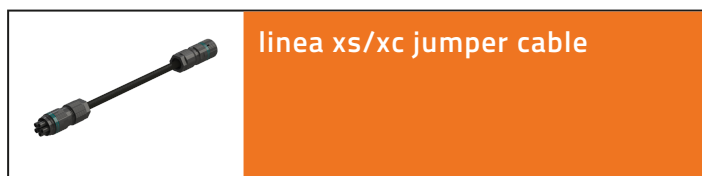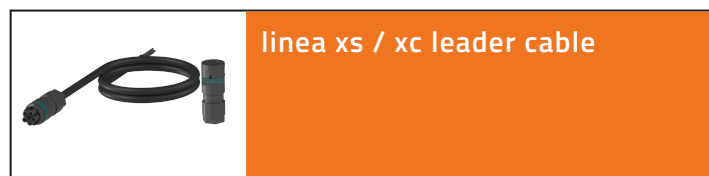

Configurator

LIN-XC-MP - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10
 - 11 -Y01

1 Luminous color	
RGBA	RGBA
RGBW83 22	RGBW2200 K (CRI > 80 / 3 SDCM)
RGBW83 27	RGBW2700 K (CRI > 80 / 3 SDCM)
RGBW83 30	RGBW3000 K (CRI > 80 / 3 SDCM)
RGBW83 40	RGBW4000 K (CRI > 80 / 3 SDCM)

2 Dimming	
DMX	DMX

3 Dimension	
327	327 mm / 12.87 in
480	480 mm / 18.90 in
632	632 mm / 24.88 in
785	785 mm / 30.91 in
937	937 mm / 36.89 in
1090	1090 mm / 42.91 in
1242	1242 mm / 48.90 in

4 Beam Angle	
8X8	8° x 8°
10X10	10° x 10°
23X23	23° x 23°
43X43	43° x 43°
8X31	8° x 31°
10X42	10° x 42°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°
60X30	60° x 30°

5 Housing color	
R____S M	RAL____, (smooth, matt)
DB703F	DB 703 metallic dark grey fine-textured

6 Glare Protection	
OP	No Glare Protection
HL64	Honeycomb louver (internal, 6,4mm)
LL0	Linear louver (internal)

7 Approbation	
CE	European Union
ETL	North America

8 Wiring configuration	
IOCC	IN/OUT with Connector
IXCX	IN only, with Connector
I000	IN/OUT with open ends
IOOC	IN open end / OUT socket
IXOX	IN only, with open end

9 Luminaire circuit	
PD	Power-Data
C1	Circuit 1
C2	Circuit 2

linea xc mp *Color Changing*

10 Leader cable length	
ETE	End to end - Leader length
003	30 cm (11.8 in) leader cable
006	60 cm (23.6 in) leader cable
009	90 cm (35.4 in) leader cable
012	1,2 m (47.2 in) leader cable
030	3 m (118 in) leader cable

11 Mounting	
BS	Universal mounting bracket (Stainless Steel)
BS_----- GM	Universal mounting bracket RAL_-----, (smooth, matt)
ND	No bracket