



tantulus xhp

pureWhite

Dimensions



Metric:

310 mm, 615 mm, 920 mm, 1225 mm, 1530 mm, 1835 mm (X)
23 mm (Y)
19 mm (Z)








Imperial

12.21 in, 24.22 in, 36.23 in, 48.23 in, 60.24 in, 72.25 in (X)
0.91 Inch (Y)
0.75 Inch (Z)

Technical Data

| | | | |
|--|--|--|---|
| Luminous color | 2000 K, 2200 K, 2700 K, 3000 K, 3500 K, 4000 K, 6500 K | Lumen Maintenance [L70] @ 25 °C | 65,000 h |
| Luminous flux | 310 mm 12.21 in → max. 820 lm 615 mm 24.22 in → max. 1640 lm 920 mm 36.23 in → max. 2460 lm 1225 mm 48.23 in → max. 3280 lm 1530 mm 60.24 in → max. 4100 lm 1835 mm 72.25 in → max. 4920 lm | Lumen Maintenance [L70] @ 40 °C | 40,000 h |
| Number of LED(s) | 310 mm 12.21 in → 20 LEDs 615 mm 24.22 in → 40 LEDs 920 mm 36.23 in → 60 LEDs 1225 mm 48.23 in → 80 LEDs 1530 mm 60.24 in → 100 LEDs 1835 mm 72.25 in → 120 LEDs | Impact protection rating | IK02 |
| Dimming | External operating device, e.g. DALI, DMX | Dimming | External operating device, e.g. DALI, DMX |
| Housing | Extruded aluminium profile | LED-Class | Class 2 LED-Product |
| Housing color | Aluminium anodized | Approbation | CE, FCC, ETL |
| Lens | PMMA | Designed and Developed in Bavaria. Made in Germany. | |
| Environment | Indoor | | |
| Ingress protection rating | IP20 | | |
| Humidity | 0 to 95%, non-condensing | | |
| Ambient temperature (Operation) | 5 °C to 40 °C 41 °F to 104 °F | | |
| Ambient temperature (Storage) | 5 °C to 80 °C 41 °F to 176 °F | | |
| Ambient temperature (Start-up process) | 5 °C to 40 °C 41 °F to 104 °F | | |

Beam Angles

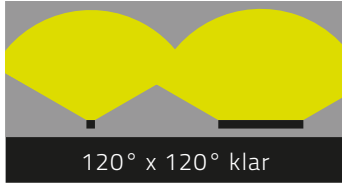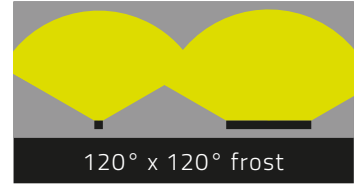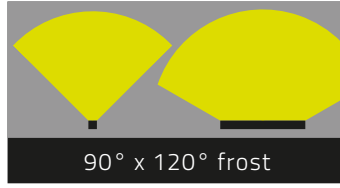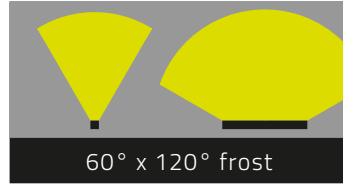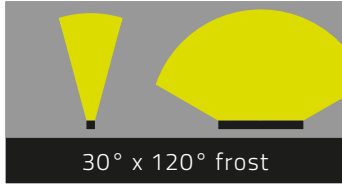


Accessories



VS-Series 100
Reliable. Easy to Install. Built to Last.



VS-Series 300
Reliable. Easy to Install. Built to Last.



VS-Series 600
Reliable. Easy to Install. Built to Last.

Configurator



TAN-XHP - - - -Y04

| 1 Luminous color | |
|------------------|-------------------------------|
| PW8220 | pW 2000 K (CRI > 80 / 2 SDCM) |
| PW8222 | pW 2200 K (CRI > 80 / 2 SDCM) |
| PW8227 | pW 2700 K (CRI > 80 / 2 SDCM) |
| PW8230 | pW 3000 K (CRI > 80 / 2 SDCM) |
| PW8235 | pW 3500 K (CRI > 80 / 2 SDCM) |
| PW8240 | pW 4000 K (CRI > 80 / 2 SDCM) |
| PW8265 | pW 6500 K (CRI > 80 / 2 SDCM) |

| 2 Dimension | |
|-------------|--------------------|
| 310 | 310 mm 12.20 in |
| 615 | 615 mm 24.21 in |
| 920 | 920 mm 36.22 in |
| 1225 | 1225 mm 48.23 in |
| 1530 | 1530 mm 60.24 in |
| 1835 | 1835 mm 72.24 in |

| 3 Beam Angle | |
|--------------|-----------------------|
| 30X120 (F) | 30° x 120° frost (F) |
| 60X120 (F) | 60° x 120° frost (F) |
| 90X120 (F) | 90° x 120° frost (F) |
| 120X120 (F) | 120° x 120° frost (F) |
| 120X120 (C) | 120° x 120° klar (C) |
| 120X120 (W) | 120° x 120° weiß (W) |
| SQR(W) | 186° x 110° weiß |

| 4 Mounting | |
|------------|-------------------|
| K0 | Bracket Set 0° |
| K15 | Bracket Set 15° |
| K30 | Bracket Set 30° |
| K45 | Bracket Set 45° |
| K60 | Bracket Set 60° |
| KADJ | Positioning Hinge |